

inoBEAM

Delivery pumps



Delivery pumps for efficient spraying and grouting of liquid and paste-like materials.

We make your construction site easier!

Delivery pumps make your work easier!





inoBEAM M8

The handy 230 V peristaltic delivery pump for liquid and paste-like materials

Benefits at a glance

- Lightweight, small and handy
- For liquid and paste-like materials
- Extremely efficient peristaltic pump technology
- Simple operation
- Very fast cleaning and maintenance
- Continuously variable quantity control
- Suitable for dry running
- Detachable plastic material hopper
- Forward and reverse running
- Can be combined with large containers (drum)



The **inoBEAM M8** delivery pump handles materials based on the "walk principle". A flexible rubber disc pushes the material to be conveyed through the pump housing and into the material hose.

This delivers a considerable benefit: less frictional heat is generated and the material is conveyed very efficiently. The very fast cleaning and simple maintenance processes keep operating costs low and save time.

Areas of application

Liquid and paste-like materials, paints, plasters, fillers and reinforcing compounds, bitumen and much more (see table on page 8)

Technical data

Max. operating pressure	15 bar
Operating voltage	230 V / 16 A / 50 Hz
Motor rating	0.55 kW
Delivery rate	0 - 8 l/min
Delivery range	Up to 30 m*
Delivery height	Up to 20 m*
Material hopper	30 l
Dimensions (L x W x H)	600 x 230 x 750mm
Weight	approx. 28 kg

* Depending on the material consistency

Basic module

Item no. 10000080-008

Scope of delivery inoBEAM M8:

- Rack made from stainless steel
- Plastic material hopper
- Gear motor
- Peristaltic pump unit
- Electrical control system with 3 m connecting cable
- Operating instructions



inoBEAM M8 Plaster Set

Item no. 10040770

Scope of delivery

As with the basic module (item no. 10000080-008)

Plus:

- 10 m combination material hose with a diameter of 1"
- Spray pipe with nozzles (4, 5, 6, 8, 10, 13 mm)
- Remote control cable, 16 m
- Cover for material hopper

inoBEAM M8 Bitumen Set

Item no. 10042326

Scope of delivery

As with the basic module (item no. 10000080-008)

Plus:

- 10 m combination material hose with a diameter of 1"
- Angled spray head with GEKA coupling incl. 8 mm nozzle
- Remote control cable, 16 m
- Cover for material hopper

**Accessories from
page 9**

inoBEAM F12

The versatile 230 V delivery pump for liquid and paste-like materials

Benefits at a glance

- Lightweight, small and handy
- For liquid and paste-like materials
- Continuously variable speed control using potentiometer
- Simple operation
- Simple cleaning and maintenance
- Detachable plastic material hopper
- For particle sizes up to 6 mm (e.g. finishing plaster)
- Forward and reverse running



The **inoBEAM F12** is a compact and versatile 230 V delivery pump. With the optional sets that are available, the delivery pump can be converted for various fields of application in just a couple of steps. This offers maximum flexibility on your construction site thanks to unlimited areas of application (spraying, bonding, filling, reinforcing and now also paint spraying, etc.) with an unbeatable price/performance ratio.

Areas of application

Liquid and paste-like materials, renovation and sealing applications, acoustic coats, fire protection mortar, decorative fine coats, liquid woodchip and much more.
(See table on page 8)

Technical data

Max. operating pressure	16 bar
Operating voltage	230 V / 16 A / 50 Hz
Motor rating	1.5 kW (frequency-controlled)
Delivery rate	0 - 12 l/min
Delivery range	Up to 30 m*
Delivery height	Up to 20 m*
Material hopper	50 l
Dimensions (L x W x H)	1,450 x 530 x 700 mm
Weight	approx. 65 kg

* Depending on the material consistency

Basic module

Item no. 10044357

Scope of delivery inoBEAM F12:

- Frame
- 2 running wheels & 2 steering wheels
- Plastic material hopper
- Cover for material hopper
- Gear motor
- Electric control system with 10 m connecting cable
- Pump shaft
- Pump housing made from stainless steel
- Mortar pressure gauge
- Tool set
- Assembly spray lubricant
- Operating instructions



Set "D"-F12

for spray applications (12 l / 15 bar)
Item no. 10044358*

Set "HP"-F12

for airless spraying of filling compounds and colour (6 l / 85 bar)
Item no. 10044660*

* For scope of delivery, see accessories

Accessories from page 9

inoBEAM F30

The efficient 230 V delivery pump for liquid and paste-like materials

Benefits at a glance

- For liquid and paste-like materials
- Detachable plastic material hopper
- High delivery rate
- Continuously variable speed control using potentiometer
- Simple operation



The **inoBEAM F30** is an efficient 230 V delivery pump suitable for a wide range of indoor and outdoor applications. The simple and clear layout of the controls make working safe and easy. With the optional sets that are available, the delivery pump can be converted for various fields of application in just a couple of steps. This offers maximum flexibility on your construction site thanks to unlimited areas of application (spraying, adhesion, filling, reinforcing and now also paint spraying, etc.) with an unbeatable price/performance ratio.

Areas of application

Liquid and paste-like materials, acoustic finishing coats, liquid woodchip, porous concrete coats, floor levelling compounds and much more. (See table on page 8)

Technical data

Max. operating pressure	40 bar
Operating voltage	230 V / 16 A / 50 Hz
Motor rating	3.0 kW
	(frequency-controlled)
Delivery rate	2 - 50 l/min
Delivery range	Up to 80 m*
Delivery height	Up to 25 m*
Material hopper	50 l
Dimensions (L x W x H)	1,450 x 530 x 700 mm
Weight	approx. 85 kg

* Depending on the material consistency

Basic module

Item no. 10041083

Scope of delivery

inoBEAM F30:

- Frame
- 2 running wheels & 2 steering wheels
- Plastic material hopper
- Cover for material hopper
- Gear motor
- Switching cabinet
- 3 m connecting cable
- Pump shaft
- Pump housing made from stainless steel
- Tool set
- Assembly spray lubricant
- Operating instructions



Set "D"-F30

for spray applications (18 l / 40 bar)

Item no. 10041913*

Set "R"-F30

for floor levelling compounds (50 l / 15 bar)

Item no. 10043416*

Set "HP"-F30

for airless spraying of filling compounds and colour (8 l / 90 bar)

Item no. 10044659*

* For scope of delivery, see accessories

**Accessories from
page 9**



inoBEAM F50

The most powerful 400 V delivery pump

Benefits at a glance

- For paste-like materials
- For coarse-grained materials
- Material hopper made of steel
- Very high delivery rate
- Continuously variable speed control using potentiometer
- Simple operation



The **inoBEAM F50** is the most powerful 400 V delivery pump and is suitable for a wide range of indoor and outdoor applications. Especially suitable for restoration plasters, single-layer scratch plaster and concrete repair materials as well as floor levelling compounds or reprofiling mortar.

With the optional sets that are available, the delivery pump can be converted for various fields of application in just a couple of steps. This offers maximum flexibility on your construction site thanks to unlimited areas of application (spraying, bonding, filling, reinforcing, etc.).

Areas of application

Paste-like materials, fine scratch plaster, industrial screeds, SPCC mortar, floor filling compounds, floor levelling compounds and much more (see table on page 8)

Technical data

Max. operating pressure	40 bar
Operating voltage	400 V / 32 A / 50 Hz
Motor rating	6.3 kW frequency-controlled
Delivery rate	2 – 100 l/min
Delivery range	Up to 80 m*
Delivery height	Up to 40 m*
Material hopper	70 l
Dimensions (L x W x H)	approx. 1,000 x 660 x 750 mm
Weight	approx. 130 kg

* Depending on the material consistency



Basic module

Item no. 10043421

Scope of delivery inoBEAM F50:

- Frame
- 4 running wheels
- Material hopper made of steel
- Gear motor
- Switching cabinet
- Tool set
- Assembly spray lubricant
- Operating instructions

Set "D"-F50/F70

for spray applications (22 l / 40 bar)
Item no. 10043978

Set "Ü1"-F50/F70

for industrial screeds (100 l / 15 bar)
Item no. 10043790*

Set "Ü2"-F50/F70

for floor levelling compounds (100 l / 30 bar)
Item no. 10043937*

Set "RS"-F50/F70

for the processing of coarse-particle material up to grit size 8 mm (50 l / 15 bar)
Item no. 10043791*

* For scope of delivery, see accessories

Accessories from page 9

inoBEAM F70

The 400 V high-performance delivery pump

Benefits at a glance

- For paste-like materials
- For coarse-particle materials
- Material hopper made of steel
- Very high delivery rate
- Continuously variable speed control using potentiometer
- Simple operation



The **inoBEAM F70** is the 400 V high-performance delivery pump and is suitable for a wide range of indoor and outdoor applications. Especially suitable for restoration plasters, single-layer sgraffito and concrete repair materials as well as floor levelling compounds or reprofiling mortar. With the optional sets that are available, the delivery pump can be converted for various fields of application in just a couple of steps. This offers maximum flexibility on your construction site thanks to unlimited areas of application (spraying, bonding, filling, reinforcing, etc.).

Areas of application

Paste-like materials, fine sgraffito, industrial screeds, SPCC mortar, floor filling compounds, floor levelling compounds and much more (see table on page 8)

Technical data

Max. operating pressure	40 bar
Operating voltage	400 V / 32 A / 50 Hz
Motor rating	7.5 kW
	frequency-controlled
Delivery rate	2 – 100 l/min
Delivery range	Up to 100 m*
Delivery height	Up to 50 m*
Material hopper	70 l
Dimensions (L x W x H)	approx. 1,100 x 720 x 750 mm
Weight	approx. 140 kg

* Depending on the material consistency



Basic module Item no. 10044712

Scope of delivery inoBEAM F70:

- Frame
- 4 running wheels
- Material hopper made of steel
- Gear motor
- Switching cabinet
- Tool set
- Assembly spray lubricant
- Operating instructions

Set "D"-F50/F70 for spray applications (22 l / 40 bar) Item no. 10043978

Set "Ü1"-F50/F70 for industrial screeds (100 l / 15 bar) Item no. 10043790*

Set "Ü2"-F50/F70 for floor levelling compounds (100 l / 30 bar) Item no. 10043937*






Set "RS"-F50/F70 for the processing of coarse-particle material up to grit size 8 mm (50 l / 15 bar) Item no. 10043791*

Set "HP"-F70 for airless spraying of filling compounds and colour (17 l / 120 bar) Item no. 10044743*

* For scope of delivery, see accessories

 **Accessories from page 9**



Technical data					
	inoBEAM M8	inoBEAM F12	inoBEAM F30	inoBEAM F50	inoBEAM F70
Operating pressure	max. 15 bar	max. 16 bar	max. 40 bar**	max. 40 bar**	max. 40 bar**
Operating voltage	230 V / 16 A / 50 Hz	230 V / 16 A / 50 Hz	230 V / 16 A / 50 Hz	400 V / 32 A / 50 Hz	400 V / 32 A / 50 Hz
Motor rating	0.55 kW	1.5 kW frequency-controlled	3.0 kW frequency-controlled	6.3 kW frequency-controlled	7.5 kW frequency-controlled
Delivery rate**	0 - 8 l/min.	0 - 12 l/min	2 - 50 l/min	2 - 100 l/min	2 - 100 l/min
Delivery range*	Up to 30 m	Up to 30 m	Up to 80 m	Up to 80 m	Up to 100 m
Delivery height*	Up to 20 m	Up to 20 m	Up to 25 m	Up to 40 m	Up to 50 m
Material hopper	30 l	50 l	50 l	70 l	70 l
Dimensions (L x W x H)	600 x 230 x 750 mm	1,450 x 530 x 700 mm	1,450 x 530 x 700 mm	1,100 x 660 x 750 mm	1,100 x 720 x 750 mm
Weight	approx. 28 kg	approx. 65 kg	approx. 85 kg	approx. 130 kg	approx. 140 kg
Particle size to be processed	Up to 3 mm	Up to 6 mm** (e.g. finishing plaster)	Up to 6 mm**	Up to 8 mm**	Up to 8 mm**

* Depending on the material and hose diameter

** Depending on the rotor/stator

Areas of use

	inoBEAM M8	inoBEAM F12	inoBEAM F30	inoBEAM F50	inoBEAM F70
Airless spray-on filling compounds		With set "HP"-F12	With set "HP"-F30		With set "HP"-F70
Outdoor / indoor dispersion paint Silicate paint *		With set "HP"-F12	With set "HP"-F30		With set "HP"-F70
Fine acoustic finishing coats					
Acoustic renovation paint					
Multi-layer acoustic spray plasters					
Cotton plasters					
Concrete bonder					
Bitumen					
Floor filling compounds					
Fire protection mortar					
Decorative fine coats					
Liquid woodchip					
Floor levelling compounds					
Porous concrete coats					
Lime-based finishing plasters					
Lime plasters					
Lime cement plasters					
Mineral textured plasters					
Paste-like textured plasters					
Plaster primer					
Reprofiling mortar					
Renovating plaster systems					
SPCC Mortar					
SPCC filler					
Spray-on filling compounds					
ETICS glue, mineral					
ETICS glue, paste-like					
Cement pastes, suspensions					
Cement plasters					

* The material can be applied using a machine – treatment with a brush or roller afterwards is possible.
It is essential that the information the manufacturer has provided about the material be observed!

Accessories

inoBEAM F70

inoBEAM F50

inoBEAM F30

inoBEAM F12

inoBEAM M8

	Combination material hose <ul style="list-style-type: none">• For applying, with integrated air hose• Colour: black / yellow• Operating pressure: 20 bar• With GEKA couplings, lockable			Ø	Length	Item no.	●	●	●	●	●	
				3/4"	10 m	10022140	✓	✓	—	—	—	
				1"	5 m	10008344-007	✓	✓	—	—	—	
				1"	10 m	10008344-003	✓	✓	—	—	—	
				1"	15 m	10008344-005	✓	✓	—	—	—	
	Material hose <ul style="list-style-type: none">• Colour: black / yellow• Operating pressure: 20 bar• With GEKA coupling, lockable			Ø	Length	Item no.						
				1/2"	10 m	10008345-005	✓	✓	—	—	—	
				1"	10 m	10008345-001	✓	✓	—	—	—	
	Water/air hose <ul style="list-style-type: none">• For universal use, e.g. air, water• GEKA couplings crimped with sleeves on both sides Technical data: Max. operating pressure: 20 bar Temperature range: -20°C up to +90°C			Ø	Length	Item no.						
				1/2"	10 m	10022000	✓	✓	✓	✓	✓	
				1/2"	15 m	10022001	✓	✓	✓	✓	✓	
				1/2"	20 m	10022002	✓	✓	✓	✓	✓	
				3/4"	20 m	10022011	✓	✓	✓	✓	✓	
	Ultralight hose - with mortar coupling - with GEKA coupling			Ø	Length	Item no.						
				25 mm	10 m	10043874	—	—	✓	✓	✓	
				25 mm	10 m	10043875	✓	✓	—	—	—	
	Inotec mortar hose <ul style="list-style-type: none">• Abrasion-resistant special hose for pumping wet mortar under high pressure, largely kink-proof• For an operating pressure of 40 bar with 3 times the reliability• Yellow on the outside: less heat builds up in the event of sun exposure• With mortar hose couplings, M-piece and rotating V-piece (only with diameters of 25 mm)• With cam levers on the M-piece Technical data: Operating pressure: 40 bar / bursting pressure: 120 bar			Ø	Length	Item no.						
				25 mm	10 m	10008346-001	—	—	✓	✓	✓	
				25 mm	15 m	10008346-002	—	—	✓	✓	✓	
				25 mm	20 m	10008346-003	—	—	✓	✓	✓	
				35 mm	10 m	10022032	—	—	✓	✓	✓	
				35 mm	20 m	10008346-007	—	—	✓	✓	✓	
	Inotec mortar hose <ul style="list-style-type: none">• Abrasion-resistant special hose for pumping wet mortar under high pressure, largely kink-proof• For an operating pressure of 40 bar with 3 times the reliability• Black on the outside• With mortar hose, M-piece couplings and rotating V-piece (only at Ø 25 mm)• With cam levers on the M-piece Technical data: Operating pressure: 40 bar / bursting pressure: 120 bar			Ø	Length	Item no.						
				40 mm	13.3 m	10041544	—	—	✓	✓	✓	
				40 mm	20 m	10041545	—	—	✓	✓	✓	
				50 mm	13.3 m	10008346-010	—	—	—	✓	✓	
				50 mm	20 m	10008346-011	—	—	—	✓	✓	
	High-pressure / hoses	Ø in mm	Connecting screw joint	Max. Operating pressure	Length	Item no.						
		12	1/2" IT	275 bar	2 m	10044639	—	✓	✓	—	✓	
		19	3/4" IT	215 bar	10 m	10044638	—	✓	✓	—	✓	
		19	3/4" IT	215 bar	20 m	10044637	—	—	✓	—	—	
		25	1" IG	165 bar	10 m	10044635	—	—	—	—	✓	
		25	1" IG	165 bar	20 m	10044636	—	—	—	—	✓	
	INOTEC airless gun AG 190 LB for inoBEAM F12 / F30 and F70 HP <ul style="list-style-type: none">• Connection 3/8" male, including swivel / Maximum pressure: 250 bar Not included in the scope of delivery: <ul style="list-style-type: none">• RAC X nozzle holder• HDA nozzle 439• HDA nozzle 543• HDA nozzle 655• Transition nipple 3/4" AG x 1/2" IG• Adapter 1/2" AG x 3/8" IG• Adapter 1/2" AG x 1" AG						Item no.					
							10044654	—	✓	✓	—	✓
							10012119	—	✓	✓	—	✓
							10008017-004	—	✓	—	—	—
							10008017-018	—	—	✓	—	—
							10008017-015	—	—	—	—	✓
							10043718	—	✓	✓	—	✓
							10044655	—	✓	✓	—	✓
							10044642		—	—	—	✓











Accessories

inoBEAM F70
inoBEAM F50
inoBEAM F30
inoBEAM F12
inoBEAM M8

	Double nipple • Hose connection – this connection is rigid; does not rotate	Type	max. pressure	Item no.	inoBEAM F70	inoBEAM F50	inoBEAM F30	inoBEAM F12	inoBEAM M8
		1/2" ET x 1/2" ET	500 bar	10022161	—	✓	✓	—	—
		1" AG x 1" AG	345 bar	10044745	—	—	—	—	✓
	Reprofiling sprayer • Reprofilng spraying device, 35 V with nozzle pipe 12 mm, connection 35 V piece • Nozzle pipe 12 mm • Nozzle pipe 15 mm	Item no.							
		10023309		—	—	✓	✓	✓	
		10022789		—	—	✓	✓	✓	
		10022790		—	—	✓	✓	✓	
	Flushing hose • For clearing blockages in mortar hoses	Length	Item no.						
		10 m	10024385	✓	✓	✓	✓	✓	
	Connecting cable, 230 V / 3 x 2.5 mm² • 16 A Schuko plug and CEE coupling	Length	Item no.						
		15 m	10015126	—	—	✓	—	—	
	400 V / 5 x 4 mm² extension cable • 32 A plug and socket	Length	Item no.						
		20 m	10015201	—	—	—	✓	✓	
	Extension cable, 230 V 3 x 2.5 mm² • 16 A Schuko plug and coupling	Length	Item no.						
		10 m	10015208	✓	✓	—	—	—	
	Cable reel made from impact-resistant plastic 3 x 2.5 mm² • Plastic cable reel with 33 m H07BQ-F3G2.5 cable • Robust impact-resistant design, all-round rollover protection • 4 European Schuko sockets (splashproof, with self-closing covers) • Protection class: IP44	Length	Item no.						
		33 m	10044024	✓	✓	✓	—	—	
	Wireless remote control • Wireless remote control, 3-channels, with handheld transmitter, integrated antenna, 4-pole Harting plug with LED display • Only for devices with a control voltage of 24 V / 42 V • Function: ON / OFF / TEST	Item no.							
		10044303		✓	✓	✓	✓	✓	
	Remote control cable with remote control switch	Length	Item no.						
		16 m	10042464	✓	✓	✓	✓	✓	
		32 m	10042465	✓	✓	✓	✓	✓	
	Remote control extension cable without remote control switch • For remote control cable • For remote control switch • For inoCOLL / inoCOLL Pro one-handed gun	Length	Item no.						
		16 m	10015210	✓	✓	✓	✓	✓	
		32 m	10042463	✓	✓	✓	✓	✓	
	Adapter for remote control cable • m-tec plug – Harting socket • m-tec socket – Harting plug	Item no.							
		10015121		✓	✓	✓	✓	✓	
		10015120		✓	✓	✓	✓	✓	

Accessories

inoBEAM F70
inoBEAM F50
inoBEAM F30
inoBEAM F12
inoBEAM M8

	Remote control switch • With 0.2 m cable, indicator light and 4-pole Harting plug		Item no.	•	•	•	•	•
			10015134	✓	✓	✓	✓	✓
	Hose holder • For rapidly fixing hoses to the scaffold		Item no.					
			10018503	✓	✓	✓	✓	✓
	inoCOLL one-handed gun with mortar coupling • For bonding and basecoat mortars • Whip hose 2 m, Ø 19 mm with an LW 24 mortar connection coupling suitable for a 25 mm mortar hose • For particle sizes up to 1.5 mm		Item no.					
			10024144	—	—	✓	✓	✓
	inoCOLL one-handed gun with GEKA coupling • For bonding and basecoat mortars • For particle sizes up to 1.5 mm		Item no.					
			10024143	✓	✓	—	—	—
	inoCOLL PRO one-handed gun with mortar coupling • For bonding and basecoat mortars • For particle sizes up to 4.0 mm		Item no.					
			10041950	—	—	✓	✓	✓
	inoCOLL PRO one-handed gun with GEKA coupling • For bonding and basecoat mortars • For particle sizes up to 4.0 mm		Item no.					
			10041973	✓	✓	—	—	—
	Spray attachment for inoCOLL / PRO one-handed gun with GEKA air connection • For spraying mineral and paste-like products • With 10 mm nozzle		Item no.					
			10039322	—	—	✓	✓	✓
	Spray attachment for inoCOLL / PRO one-handed gun with EWO air connection • For spraying mineral and paste-like products • With 10 mm nozzle		Item no.					
			10042332	✓	✓	—	—	—
	"Joint Set" nozzle attachment (10044173) for inoCOLL / PRO One-handed gun, complete – consisting of 6, 9 and 13 mm diameter nozzle attachments and a GEKA coupling	Nozzle attachment	Item no.					
		Nozzle attachment, complete	10044173	✓	—	—	—	—
		Nozzle attachment: 6 mm, ET 3/4"	10043198	✓	—	—	—	—
		Nozzle attachment: 9 mm, ET 3/4"	10043199	✓	—	—	—	—
		Nozzle attachment: 13 mm, ET 3/4"	10043200	✓	—	—	—	—
	Short spray pipe in a set with GEKA coupling Short, lightweight spray pipe for spraying paste-like materials. Thanks to the special nozzle geometry, a small compressor (air flow rate from 200 l/min.) is sufficient to achieve a very good spray pattern. The air quantity can be regulated using the integrated mini ball valve. • For grit sizes up to 3 mm Scope of delivery: Short spray pipe in a set, including 4 / 5 / 6 / 8 / 10 / 13 mm nozzles, nozzle bit, cleaning brush, in a systainer		Item no.					
			10039886	✓	✓	—	—	—













Accessories

inoBEAM F70
inoBEAM F50
inoBEAM F30
inoBEAM F12
inoBEAM M8

	Small spray pipe in a set with GEKA coupling Small, lightweight spray pipe for spraying paste-like materials. For particle sizes up to 3 mm. Due to the nozzle geometry, a compressor with an air flow rate of at least 250 l/min is required. The air quantity can be regulated using the integrated mini ball valve. Scope of delivery: Small spray pipe in a set with 4.5 / 6.5 / 8.5 / 10.5 mm nozzles, nozzle bit and cleaning brush, in a systainer	Item no.	•	•	•	•	•
		10012707	✓	✓	—	—	—
	Paint spray set for inoBEAM M8 Scope of delivery: 20 m combination material hose 1/2" with GEKA coupling (lockable), Spray pipe short (10012700), slit nozzle (10024202)	Item no.					
		10044204	✓	—	—	—	—
	Spray set for inoBEAM M8 for any water-based, unfilled base paints and primers and unfilled anti-porosity treatments. Scope of delivery: Spray lance, fabric hose, plastic case	Item no.					
		10044183	✓	—	—	—	—
	Angled spray head with GEKA coupling • E.g. for spraying bitumen, etc. • Length: 65 cm • 45° angle Scope of delivery: Spray head including 8 mm nozzle	Item no.					
		10039457	✓	✓	—	—	—
	Short spray pipe with mortar coupling 25 mm Short, lightweight spray pipe with L24 coupling for spraying paste-like materials. Thanks to the special nozzle geometry, a small compressor (air flow rate from 200 l/min.) is sufficient to achieve a very good spray pattern. The air quantity can be regulated using the integrated mini ball valve. • For particle sizes up to 3 mm / • Suitable for a 25 mm mortar hose Scope of delivery: Short spray pipe with 2 m whip hose (diameter 19 mm), with mortar coupling 25 mm and 2 m air hose with GEKA coupling, <u>without</u> nozzles	Item no.					
		10039887	—	—	✓	✓	✓
	Small spray tube for 2-component material with Geka coupling. Small, lightweight spray pipe for spraying 2-component material. For particle sizes up to 3 mm. The air quantity can be regulated using the integrated mini ball valve. The needle valve attached regulates the supply of additives. Scope of delivery: Small spray pipe in set incl. nozzles 4.5 / 6.5 / 8.5 / 10.5 mm and corner piece	Item no.					
		10044317	✓	—	—	—	—
	Nozzles for: - Spray attachment for inoCOLL / PRO one-handed gun (10039322) - Short spray pipe with mortar coupling 25 (10039887) - Angled spray head with GEKA coupling (10039457) - Short spray pipe as a set (10039886) • Made from stainless steel * For particle sizes up to 6 mm	Ø					
		4 mm	10044445	✓	✓	✓	✓
		5 mm	10044446	✓	✓	✓	✓
		6 mm	10044447	✓	✓	✓	✓
		8 mm	10044448	✓	✓	✓	✓
		10 mm	10044449	✓	✓	✓	✓
		13 mm*	10044450	✓	✓	✓	✓
	Nozzles for small spray pipe as a SET (10012707) and spray pipe small for 2 component material (10044317) • Made from stainless steel • Slot nozzle (for colour)	Ø					
		4.5 mm	10024060	✓	✓	—	—
		6.5 mm	10024062	✓	✓	—	—
		8.5 mm	10024064	✓	✓	—	—
		10.5 mm	10024058	✓	✓	—	—
	Sprayer for aqueous media The inoSPRAY Duo 6 is a versatile sprayer for quickly and easily priming and impregnating larger and smaller surfaces. Its lightweight double diaphragm pump means that using a roller is a thing of the past. Of course also suitable for wallpaper removers. Area of application: For example, water-based primers, wallpaper removers, stains, anti-porosity treatments, impregnations, algae remedies, etc. Scope of delivery: inoSPRAY Duo 6, 10 m material hose, spray gun with continuously variable control, 50 cm spray lance with adjustable spray head, wide jet nozzle.	Item no.					
		10040422	✓	—	—	—	—



Accessories

inoBEAM F70
inoBEAM F50
inoBEAM F30
inoBEAM F12
inoBEAM M8

	Material hose extension for inoSPRAY Duo 6 Length: 10 m		Item no.	•	•	•	•	•
			10015069	✓	—	—	—	—
	Exchangeable lance with flood nozzle TK 7.5 for inoSPRAY Duo 6		Item no.					
			10015116	✓	—	—	—	—
	Flood nozzle TK 7.5 for inoSPRAY Duo 6 • For impregnations		Item no.					
			10015021	✓	—	—	—	—
	Wide jet nozzle for inoSPRAY Duo 6 • For stains, cleaning agents and wallpaper removers		Item no.					
			10014979	✓	—	—	—	—
	MAI finishing coat device, straight • With 25 mm M-piece coupling • Including a 14 mm jet nozzle		Item no.					
			10024362	—	—	✓	✓	✓
	Jet nozzle • For MAI finishing coat device	Ø	Item no.					
		10 mm	10024378	—	—	✓	✓	✓
		12 mm	10024379	—	—	✓	✓	✓
		14 mm	10024380	—	—	✓	✓	✓
		16 mm	10024381	—	—	✓	✓	✓
	Straight finishing coat device • With 25 mm M-piece coupling • incl. 14 mm finishing coat nozzle		Item no.					
			10024098	—	—	✓	✓	✓
	Finishing coat nozzles • For finishing coat device, item no.: 10024098	Ø	Item no.					
		10 mm	10024089	—	—	✓	✓	✓
		12 mm	10024090	—	—	✓	✓	✓
		14 mm	10024091	—	—	✓	✓	✓
		16 mm	10024093	—	—	✓	✓	✓
	Plastic material hopper for inoBEAM F12 / F30 Material hopper as an optional attachment for the pump hopper for increasing the container volume from 10 to 50 litre.		Item no.					
			10044178	—	✓	✓	—	—
	Cover for material hopper for inoBEAM F12 / F30 • For protecting the contents of the hopper against impurities • Made from black plastic		Item no.					
			10041816	—	✓	✓	—	—
	Stainless steel material hopper for inoBEAM F50 / F70 Material hopper as an optional attachment for the pump hopper Hopper volume: 100 litres		Item no.					
			10044711	—	—	—	✓	✓
	Bag mangle • For emptying plastic bags with paste-like materials		Item no.					
			10041971	—	✓	✓	—	—









Accessories

inoBEAM F70
inoBEAM F50
inoBEAM F30
inoBEAM F12
inoBEAM M8

	Straight decorative plaster spraying device <ul style="list-style-type: none"> • Not including nozzle with 25 mm M-piece coupling • For particle sizes up to 6.0 mm 		Item no.	•	•	•	•	•
			10024246	—	—	✓	✓	✓
	Nozzle for straight decorative plaster spraying device <ul style="list-style-type: none"> • Made from stainless steel 	Ø	Item no.					
		8 mm	10024071	—	—	✓	✓	✓
		10 mm	10024065	—	—	✓	✓	✓
		12 mm	10024066	—	—	✓	✓	✓
	inoBEAM M8 service systainer <ul style="list-style-type: none"> • Contains all key wearing parts and accessories such as the diaphragm, conveyor disc, GEKA coupling, seals, etc., for rapid replacement on the construction site 		Item no.					
			10042613	✓	—	—	—	—
	Plastic material hopper for inoBEAM M8 Material hopper with a capacity of 30 litres		Item no.					
			10011958	✓	—	—	—	—
	Cover for material hopper inoBEAM M8 <ul style="list-style-type: none"> • For protecting the hopper contents from impurities • Made from black plastic 		Item no.					
			10011830	✓	—	—	—	—
	Green conveyor disc		Item no.					
			10011858	✓	—	—	—	—
	Diaphragm (price per pair)		Item no.					
			10011890	✓	—	—	—	—
	GLEITMO silicone paste <ul style="list-style-type: none"> • 100 g tube • For inoBEAM M8 diaphragm 		Item no.					
			10004505	✓	—	—	—	—
	Air quantity controller with EWO couplings <ul style="list-style-type: none"> • For precisely adjusting the air quantity when spraying. • Is connected between the air hose and spraying device. 		Item no.					
			10017793	✓	✓	✓	✓	✓
	Connecting coupling for compressors		Item no.					
		EWO V-piece on GEKA	10022353	✓	✓	✓	✓	✓
	Coupling reducer <ul style="list-style-type: none"> • For connecting two mortar hoses or reducing the machine outlet. 		Item no.					
		35 V-piece -> 25 V-piece	10022101	—	—	✓	✓	✓
		50 V-piece -> 42 V-piece	10041187	—	—	—	✓	✓
		50 V-piece -> 35 M-piece	10022100	—	—	—	✓	✓
		42 M-piece -> 35 M-piece	10022097	—	—	✓	✓	✓
	Cleaning piece with GEKA coupling <ul style="list-style-type: none"> • For cleaning mortar hoses 		Item no.					
		25 V-piece	10022113	—	—	✓	✓	✓
		35 M-piece	10022114	—	—	✓	✓	✓
		25 M-piece	10022112	—	—	✓	✓	✓
		50 M-piece	10022116	—	—	—	✓	✓
		42 V-piece	10042213	—	—	✓	✓	✓

Accessories

inoBEAM F70
inoBEAM F50
inoBEAM F30
inoBEAM F12
inoBEAM M8

	Sponge balls (soft version) • For cleaning material / mortar hoses	Ball Ø	Hose Ø	Item no.	inoBEAM F70	inoBEAM F50	inoBEAM F30	inoBEAM F12	inoBEAM M8
		20 mm	19 mm	10008116-003	✓	✓	✓	✓	✓
		30 mm	25 mm	10008116-004	✓	✓	✓	✓	✓
		45 mm	35 mm	10008116-005	—	—	✓	✓	✓
		60 mm	40/50 mm	10008116-006	—	—	✓	✓	✓
	Sponge balls (firm version) • For cleaning material / mortar hoses	Ball Ø	Hose Ø	Item no.					
		30 mm	25 mm	10008116-007	✓	✓	✓	✓	✓
		45 mm	35 mm	10008116-008	—	—	✓	✓	✓
	230 V INOTEC Compact 330 compressor The compact 230 volt compressor is ideal for many applications, such as spraying decorative coatings, plaster or bitumen, for operating compressed air tools, and for painting, etc. Technical data: Operating pressure: 10 bar Suction capacity: 330 l/min Output: 2.05 kW Dimensions (L x W x H): 396 x 473 x 598 mm Weight: 32 kg	Item no.							
		10034389			✓	✓	✓	✓	✓
	Connection unit for 2 INOTEC Compact 330 compressors consisting of check valve and EWO coupling - 2 x V parts - 1 x M-piece	Item no.							
		10019060			✓	✓	✓	✓	✓
	KAESER 230 V Compressor Premium Car 450/30W The compact 230-volt compressor is ideal for many applications, such as spraying decorative coatings, plaster or bitumen, for operating compressed air tools, and for painting, etc. Technical data: Operating pressure: 10 bar Suction capacity: 450 l/min Output: 2.2 kW Dimensions (L x W x H): 870 x 560 x 590 mm Weight: 86 kg	Item no.							
		10039227			✓	✓	✓	✓	✓
	Trolley with 2 plastic wheels for inoBEAM M8 delivery pump	Item no.							
		10030015			✓	—	—	—	—
	Set "HP"-F12 Ø 89 mm, 12 l/min, 15 bar, e.g., for spray applications Scope of delivery: Pressure and suction flange with tie rods, mortar pressure gauge, rotor/stator D6-3 Eco gold	Item no.							
		10044358			—	✓	—	—	—
	Set "HP"-F12 The delivery pump inoBEAM F12 can be converted into a high-performance 230 V airless sprayer using an optional set and just a few, easy steps. A delivery rate of up to 6 l/min is achieved with 1.5 kW when processing spray-on filler. Scope of delivery: High-pressure pump SPRAY "short", 10 m high-pressure hose 3/4" and 2 m 1/2", airless gun, pressure and suction flange "HP", pressure control and tie rod "HP", nozzle holder, nozzle	Item no.							
		10044660			—	✓	—	—	—

Accessories

inoBEAM F70
inoBEAM F50
inoBEAM F30
inoBEAM F12
inoBEAM M8

		Item no.	inoBEAM F70	inoBEAM F50	inoBEAM F30	inoBEAM F12	inoBEAM M8
	Set "HP"-F30 The delivery pump inoBEAM F30 can be converted into a high-performance 230 V airless sprayer using an optional set and just a few, easy steps. A delivery rate of up to 8 l/min is achieved with 3.0 kW when processing spray-on filler. Scope of delivery: High-pressure pump SPRAY, 20 m high-pressure hose 3/4" and 2 m 1/2", airless gun, pressure and suction flange "HP", pressure control and tie rod "HP", nozzle holder, and nozzle	10044659	—	—	✓	—	—
	Set "HP"-F70 The delivery pump inoBEAM F70 can be converted into a high-performance 400 V airless sprayer using an optional set and just a few, easy steps. A delivery rate of up to 17 l/min is achieved with 7.5 kW when processing spray-on filler. Scope of delivery: High-pressure pump SPRAY, 20 m high-pressure hose 1" and 2 m high-pressure hose 1/2", airless gun, pressure and suction flange "HP", pressure control and tie rod "HP", nozzle holder, nozzle	10044743	—	—	—	—	✓
	Set "R"-F30 (Rotor/Stator R7-1.5) Ø 115 mm, 50 l/min, 15 bar, e.g., for floor levelling compounds Scope of delivery: Suction flange, pressure flange, mortar pressure gauge, rotor/stator R7-1.5, coupling M part 50 (2" IT), 2 x M16 nuts, 2 x M16 threaded rods (330 mm), 2 x M16 double nuts	10043416	—	—	✓	—	—
	Set "D"-F30 (Rotor/stator D6-3 Eco gold) Ø 89 mm, 18 l/min, 40 bar, e.g., for spray applications Scope of delivery: Pressure and suction flange with tension rods, mortar pressure gauge, rotor/stator D6-3 Eco gold	10041913	—	—	✓	—	—
	Set "D"-F50/-F70 (Rotor/Stator D7-2.5 S) Ø 89 mm, 22 l/min, 40 bar, e.g., for spray applications Scope of delivery: Pressure and suction flange, mortar pressure gauge, pump shaft with Rotex coupling, rotor/stator D7-2.5 S, M-piece coupling, 35 (1 1/2" IT), 2 x M16 collar nuts, 2 x eyebolts	10043978	—	—	—	✓	✓
	Set "Ü1"-F50/-F70 (Rotor/Stator 1R6) Ø = 101 mm, 100 l/min, 15 bar, for e.g. industrial screeds Scope of delivery: Suction flange, pressure flange, mortar pressure gauge, pump shaft with Rotex coupling, rotor/stator 1R6, coupling M part 50 (2" IT), 4 x M16 nuts, 2 x M16 threaded rods (90 mm), 2 x M16 double nuts	10043790	—	—	—	✓	✓
	Set "Ü2"-F50/-F70 (Rotor/Stator 2R6) Ø 101 mm, 100 l/min, 30 bar - for e.g. floor levelling compound Scope of delivery: Suction flange, pressure flange, mortar pressure gauge, pump shaft with Rotex coupling, rotor/stator 2R6, coupling M part 50 (2" IT), 2 x eyebolts, 4 x M16 nuts, 2 x M16 threaded rods (270 mm), 2 x M16 double nuts	10043937	—	—	—	✓	✓
	Set "RS"-F50/-F70 (Rotor/Stator R7-1.5 with clamping strip) Ø 115 mm, 50 l/min, 15 bar, e.g., for coarse-grained materials, such as sgraffito Scope of delivery: Suction flange, pressure flange, mortar pressure gauge, Rotor/stator R7-1.5 with clamping strip, M-piece coupling, 50 (2" IT)	10043791	—	—	—	✓	✓
	Pump shaft for inoBEAM F50/-F70 for set "Ü" with Rotex coupling (without sprocket) Pump shaft for inoBEAM F50/-F70 for set "D" with Rotex coupling (without sprocket) Sprocket for Rotex coupling	10041876	—	—	—	✓	✓
		10043853	—	—	—	✓	✓
		10041878	—	—	—	✓	✓
	Pump shaft for inoBEAM F12 / F30	10006177	—	✓	✓	—	—

Accessories








inoBEAM F70

inoBEAM F50

inoBEAM F30













inoBEAM F12

inoBEAM M8
















	Hose mixer for special screeds The material is mixed again by the hose mixer. 40 mm hose mixer	Item no.	•	•	•	•	•
	35 mm hose mixer	10042509	—	—	—	✓	✓
		10042648	—	—	—	✓	✓
	Static mixers <ul style="list-style-type: none">• Prevent/destroy lumps in mortar• Diameter: 35 mm• Length: 200 mm• Incl. coupling M-part 35 mm and V-part 35 mm	Item no.					
		10042362	—	—	✓	✓	✓
	Rotor 1 R6	Item no.					
		10041243	—	—	—	✓	✓
	Stator 1 R6 (maintenance-free)	10041242	—	—	—	✓	✓
	Rotor 2R6	Item no.					
		10044018	—	—	—	✓	✓
	Stator 2R6	10044019	—	—	—	✓	✓
	Rotor D4-½ output <ul style="list-style-type: none">• Head marked in green	Item no.					
		10022543	—	—	✓	✓	✓
	Stator D4-½ output (maintenance-free)	10022502	—	—	—	✓	✓
	Stator D4-½ output, with clamping strip	10022501	—	—	—	✓	✓
	Stator D4-½ output, soft with clamping strip	10022503	—	—	✓	—	—
	Rotor D6-3 "Eco Gold" <ul style="list-style-type: none">• Head marked in gold	Item no.					
		10022552	—	—	✓	—	—
	Stator D6-3 "Eco Gold" <ul style="list-style-type: none">• Without twist protection, colour: gold	10022509	—	—	✓	—	—
	Rotor D6-3 Eco Gold short	Item no.					
		10039343	—	✓	—	—	—
	Stator D6-3 Eco Gold short	10040858	—	✓	—	—	—
	Rotor R7-1.5	Item no.					
		10022887	—	—	✓	✓	✓
	Stator R7-1.5 (maintenance-free)	10022522	—	—	✓	✓	✓
	Stator R7-1.5 with clamping strip	10023395	—	—	✓	✓	✓
	Rotor spray "short" (for high-pressure pump inoBEAM F12 HP)	Item no.					
		10044327	—	✓	—	—	—
	Stator spray "short" (for high-pressure pump inoBEAM F12 HP)	10044326	—	✓	—	—	—
	Rotor spray (for high-pressure pump inoBEAM F30 HP)	Item no.					
		10042467	—	—	✓	—	—
	Stator spray (for high-pressure pump inoBEAM F30 HP)	10042466	—	—	✓	—	—

Accessories

inoBEAM F70
inoBEAM F50
inoBEAM F30
inoBEAM F12
inoBEAM M8

	Rotor spray (for high-pressure pump inoBEAM F70 HP)	Item no.	•	•	•	•	•
		10044761	—	—	—	—	✓
	Stator spray (for high-pressure pump inoBEAM F70 HP)	Item no.	•	•	•	•	•
		10044760	—	—	—	—	✓
	Rotor D7-2.5 "S"	Item no.	•	•	•	•	•
		10022556	—	—	✓	—	—
	Stator D7-2.5 "Mono Plus" (maintenance-free)	Item no.	•	•	•	•	•
		10042506	—	—	✓	—	—
	Rotor D7-2.5 S	Item no.	•	•	•	•	•
		10022556	—	—	—	✓	✓
	Stator D7-2.5 S (maintenance-free)	Item no.	•	•	•	•	•
		10022515	—	—	—	✓	✓
	Rotor D8-1.5	Item no.	•	•	•	•	•
	• Head marked in yellow	10022562	—	—	✓	✓	✓
	Stator yellow D8-1.5 (maintenance-free)	Item no.	•	•	•	•	•
		10022517	—	—	✓	✓	✓
	Stator yellow D8-1.5 with clamping strip	Item no.	•	•	•	•	•
		10022519	—	—	✓	✓	✓
	Rotor D8-2 (maintenance-free)	Item no.	•	•	•	•	•
		10022565	—	—	—	✓	✓
	Stator D8-2 (maintenance-free)	Item no.	•	•	•	•	•
		10022496	—	—	—	✓	✓
	Professional grease gun: 400 ccm cartridges with hand lever press	Item no.	•	•	•	•	•
	• Hose length: 300 mm (Diameter: 8 mm)	10026629	—	—	✓	✓	✓
	• Material: Steel	Item no.	•	•	•	•	•
	• Good durability, easy handling	10004510	—	—	✓	✓	✓
	• Weight: 1.10 kg	Item no.	•	•	•	•	•
	Grease cartridges (replacement cartridges) for professional grease gun	10004510	—	—	✓	✓	✓
	First aid case for inoBEAM F50/F70	Item no.	•	•	•	•	•
	Scope of delivery: Systainer, grease guns incl. 2 cartridges, ratchet ring spanner 24 mm reversible, open-end ring spanners SW24 and SW13, Geka coupling 3/4" spout and 3/4" IT and 1" IT, Geka spray nozzle 3/4", Geka coupling 1/2" spout, Geka seal with beaded edging, brass strainer insert, spare strainer for pressure reducer D06F, seal for coupling 35 / 42 / 50 mm, cleaning piece 50 M-part and 35 M-part with Geka coupling, sponge ball 45 mm RG250 and 60 mm RG200, corner pipe wrench 3", multifunctional spatula B75 mm stainless steel. steel, special assembly lubricant spray (400 ml tin), connecting coupling for compressor (Geka/claw coupling), machinist's hammer 300 g, hose clamp 1/2" and 3/4" clamping range, Stanley FatMax tool box	10043923	—	—	—	✓	✓
	Assembly spray lubricant	Item no.	•	•	•	•	•
	• For assembling the rotor and stator	10004591	—	✓	✓	✓	✓
	• 400 ml						

Overview of stators / rotors for mixing and delivery pumps

Name	Item no. stator	Item no. rotor	Twist protection	Photo	Delivery output *	max. operating pressure **	Ø mm	Length mm	Grit mm	Finishing plaster	Gypsum plaster	Light plaster	Base plaster	Scratch plaster	Adhesive mortar	Restoration plaster	Filler (plaster)	Floor screed	Thin coating	Machinery
D4-1/4 Output (maintenance free)	10022524	10022534	✓		7 l/min	40 bar	89	270	3	✓	—	—	—	—	✓	—	✓	—	✓	400 V mixing and delivery pumps
D4-1/2 output with clamping strip	10022501	Without attachment points: 10022543 Stainless steel: 10022544 With attachment points, for after mixers: 10022546	✓		13 l/min	40 bar	89	270	4	✓	—	—	—	—	✓	✓	✓	—	✓	400 V mixing and delivery pumps
	10022502		✓		13 l/min	40 bar	89	270	2.5	✓	—	—	—	—	✓	✓	✓	—	✓	400 V mixing and delivery pumps
D4-1/2 output "soft", with clamping strip	10022503	10022543	✓		12 l/min	20 bar	89	270	3	✓	—	—	—	—	✓	✓	✓	—	✓	230 V mixing and delivery pumps
D6-3 "Eco-Gold" (maintenance-free)	10022509	10022552	—		18 l/min	30 bar	89	270	3	✓	—	✓	✓	—	✓	✓	✓	✓	✓	230 V mixing and delivery pumps
D6-3 "Eco Gold" half length (maintenance free)	10040858	10039343	—		17 l/min	15 bar	89	140	3	✓	—	—	—	✓	—	—	—	—	✓	Only for delivery pump InoBEAMF12
R7-1.5 (maintenance-free)	10022522	10022887	✓		50 l/min	15 bar	115	270	6	—	—	—	—	—	—	—	—	✓	—	230 / 400 V Mixing and delivery pumps
R7-1.5 with clamping strip	10023395	10022887	✓		50 l/min	15 bar	115	270	8	—	—	—	—	—	—	—	—	✓	—	230 / 400 V Mixing and delivery pumps
D7-2.5 Mono Plus (maintenance free)	10042506	10022556	✓		20 l/min	40 bar	89	270	5	✓	✓	✓	✓	—	✓	✓	✓	✓	✓	230 / 400 V Mixing and delivery pumps
D7-2.5 S (maintenance free)	10022515	10022556	✓		22 l/min	40 bar	89	270	5	✓	—	✓	✓	✓	✓	✓	✓	✓	✓	400 V delivery pumps
1R6	10041242	10041243	✓		100 l/min	15 bar	101	360	5	—	—	—	—	—	—	—	—	✓	—	400 V delivery pumps
2R6	10044019	10044019	✓		100 l/min	30 bar	101	540	5	—	—	—	—	—	—	—	—	✓	—	400 V delivery pumps
D8-1.5 with clamping strip	10022519	Without attachment points: 10022562 With attachment points, for after mixers: 10022563	✓		33 l/min	20 bar	89	270	6	✓	—	—	—	✓	—	✓	—	✓	✓	230 / 400 V Mixing and delivery pumps
D8-1.5 (maintenance-free)	10022517	With attachment points, for after mixers: 10022563	✓		33 l/min	20 bar	89	270	5	✓	—	—	—	✓	—	✓	—	✓	✓	230 / 400 V Mixing and delivery pumps
D8-2 (maintenance-free)	10022496	10022565	✓		33 l/min	30 bar	89	270	5	✓	—	—	—	✓	—	✓	—	✓	✓	400 V mixing and delivery pumps

* n = 400 rpm; measured with water

** Measured with water / observe the maximum permissible pressures of the hoses and other downstream components (generally 40 bar)

*** not in the case of delivery pumps!

Order hotline: +49 7741 6805 666 • www.inotec-gmbh.com

Locations

Your sales partner (English language)

INOTEC GmbH

(Headquarter)

Markus Fechtig (Export Sales Manager)

Daimlerstraße 9-11

79761 Waldshut-Tiengen

Germany

Phone +49 160 / 9492 5237

Fax +49 7741 / 6805 665

E-Mail: m.fechtig@inotec-gmbh.com



Wherever you are, we're there, too.




Our customers work on a wide variety of construction sites and rely on machine technology from INOTEC and on our slogan:

We make your construction site easier!

Our products:

- Continuous and forced action mixers
- Delivery pumps
- Mixing pumps
- Machine technology for One-Way-Containers
- Silo & machine technology
- One-handed guns
- Cutters
- Special sanders
- Airless devices
- Waste water systems
- Floor processing machinery

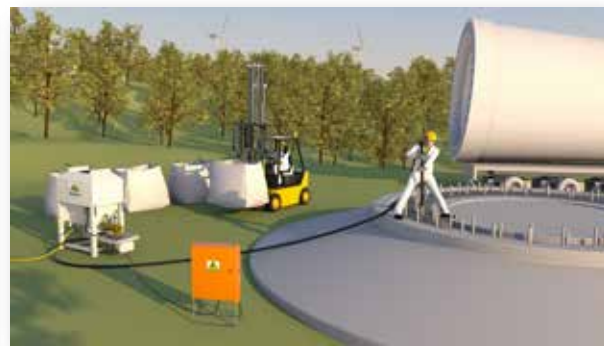

Product range



Delivery pumps



Mixing pumps



Mixers



Delivery systems



Silo technology



OWC technology




Airless devices



Cutters



Grinders



One-handed guns



Waste water systems



Floor processing



Compressed air / compressors



Heaters / air dehumidifiers / high-pressure cleaners



Accessories & spare parts



Power tools / electrical appliances

